WOOD INTERNATIONAL AGENCY

Acoustation™ ACOUSTIC PERFORMANCE SELECTOR

ACOUSTIC PERFORMANCE DATA SHEET

Rw (C; Ctr)


24 (0; 0) dB

SPECIFICATION

Door core	MARKSMAN®
Finished thickness	44 mm
Doorset configuration	SADD
Glazing configuration	Unglazed
Seal supplier	N/A
Frame intumescent seal	15x4 Fire Only
Frame acoustic seal	None
Meeting stile arrangement	2 No. 10x4 Fire Only
Threshold seal	N/A
Laboratory	Cambridge Acoustic Laboratory
Test report reference	24014-R01-A | Test No. 31

FREQUENCY BAND SOUND REDUCTION

Frequency (Hz)	R (dB)
100	17.8
125	19.2
160	21.7
200	19.9
250	20.5
315	22.6
400	23.5
500	23.9
630	24.9
800	25
1000	24.7
1250	24.6
1600	25.1
2000	25.3
2500	23.6
3150	22.3

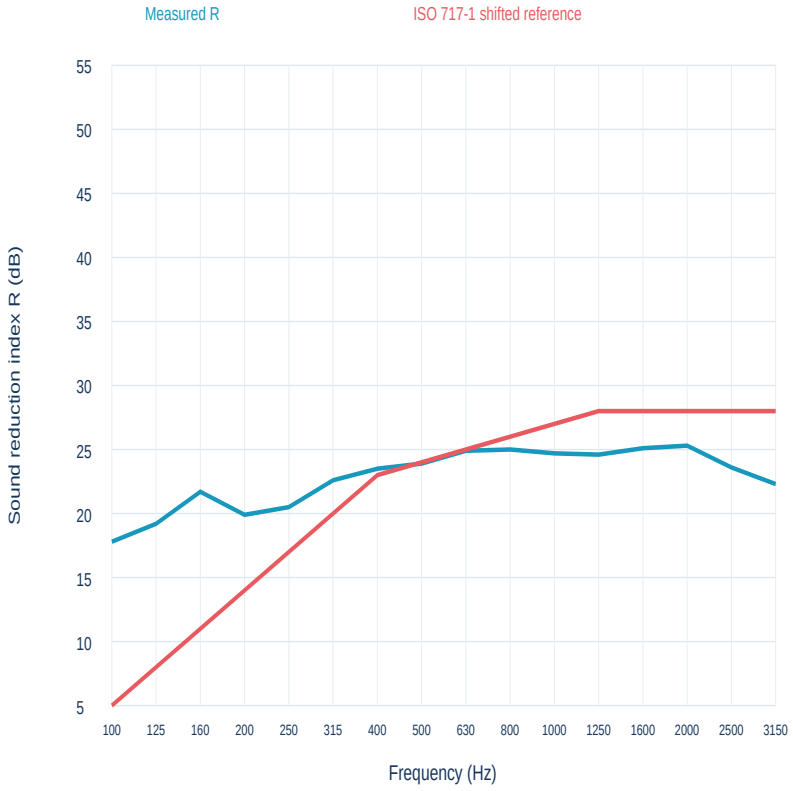

For further information, including test evidence, permitted configurations, specification guidance and appropriate applications of this doorset system, please contact Wood International Agency Ltd.