ACOUSTIC PERFORMANCE DATA SHEET

Rw (C; Ctr)


30 (-1; -1) dB

SPECIFICATION

Door core	MARKSMAN®
Finished thickness	44 mm
Doorset configuration	SASD
Glazing configuration	Unglazed
Seal supplier	Dixon International Group
Frame intumescent seal	15x4 Fire Only
Frame acoustic seal	Sealmaster Delta
Meeting stile arrangement	N/A
Threshold seal	Sealmaster DRP2712E
Laboratory	Cambridge Acoustic Laboratory
Test report reference	24014-R01-A | Test No. 18

FREQUENCY BAND SOUND REDUCTION

Frequency (Hz)	R (dB)
100	22.7
125	23.9
160	25.8
200	25.7
250	27.9
315	31.1
400	31.7
500	32.4
630	33
800	31.4
1000	28.3
1250	27.2
1600	27.6
2000	29.4
2500	31.6
3150	32.8

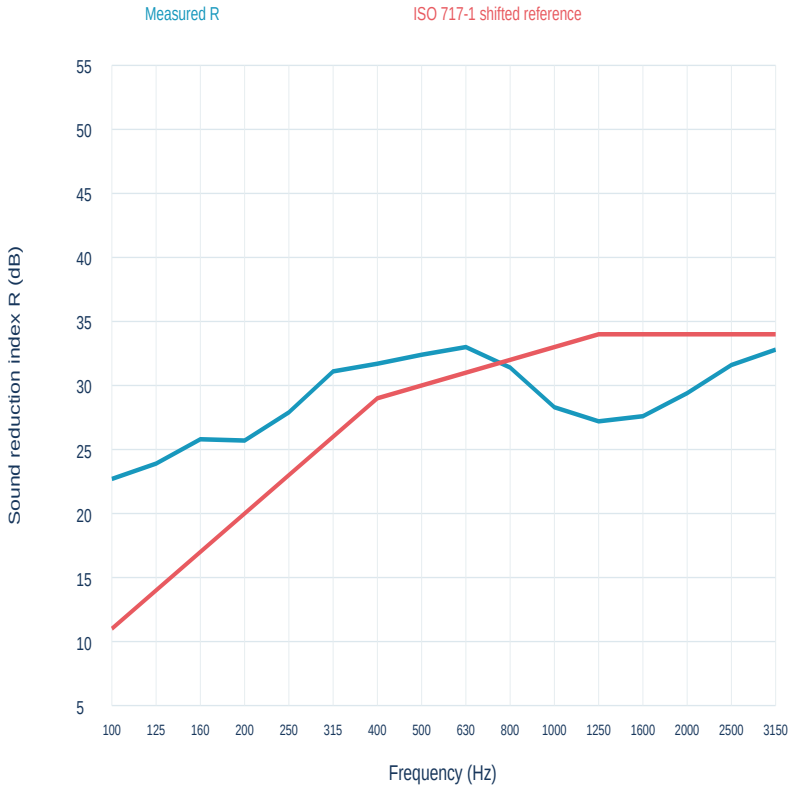

For further information, including test evidence, permitted configurations, specification guidance and appropriate applications of this doorset system, please contact Wood International Agency Ltd.