ACOUSTIC PERFORMANCE DATA SHEET

Rw (C; Ctr)


32 (-1; -1) dB

SPECIFICATION

Door core	MARKSMAN®
Finished thickness	44 mm
Doorset configuration	SASD
Glazing configuration	Glazed - 7mm Glass
Seal supplier	Dixon International Group
Frame intumescent seal	15x4 Fire Only
Frame acoustic seal	Sealmaster Delta
Meeting stile arrangement	N/A
Threshold seal	Sealmaster DRP2712E
Laboratory	Cambridge Acoustic Laboratory
Test report reference	24014-R01-A | Test No. 17

FREQUENCY BAND SOUND REDUCTION

Frequency (Hz)	R (dB)
100	21
125	22.3
160	25.8
200	25.5
250	27.2
315	30.2
400	30.8
500	31.6
630	32.6
800	33.2
1000	32.7
1250	31.8
1600	31.8
2000	31.9
2500	32.1
3150	30.9

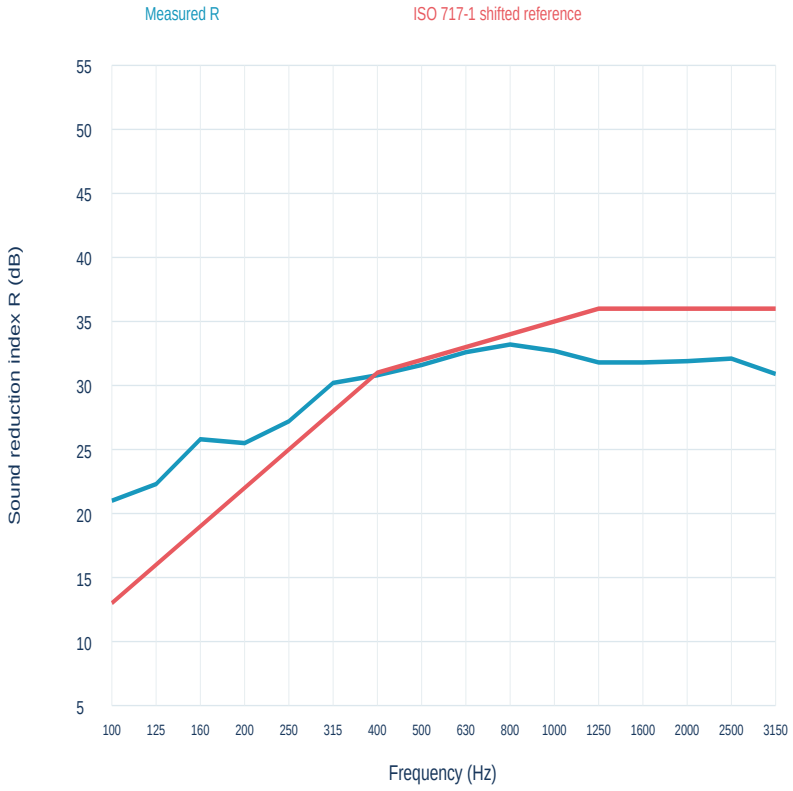

For further information, including test evidence, permitted configurations, specification guidance and appropriate applications of this doorset system, please contact Wood International Agency Ltd.